

PV ENERGY STORAGE SYSTEM

15.36kWh Stackable Floor Type Power Can


BCT-V-48-300


LiFePO₄ Battery Pack





CONFIGURATION | TECHNICAL PARAMETER



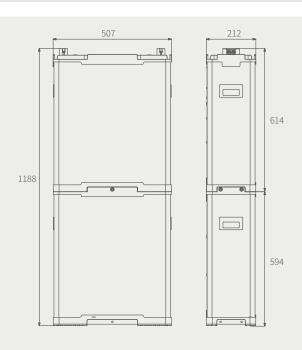

Basic Specifications

Nominal Capacity	300Ah
Nominal Voltage	48V(51.2V)
Electricity(kWh)	15.36kWh

Input

Full charge Voltage	56V-60V
Maximum Charging Voltage	90V
Input Voltage Range	60V-100V
Continuously Use Input Current	100A
Maximum Solar Panel Input Current	100A
Rshoot delay protection	1000ms

Output

100A
38V-48V
1000ms
300us
Disconnect load
300A
10S

Battery


Cell type	LiFePO4 Battery/LFP
Storage temperature range Sho	rt-Term -20°C-40°C(Within 1 month)
	Long-term 10°C-35°C(Within 1 year)
Operating temperature range	-15°C-60°C
Recommended temperature ran	ge 10°C-40°C
Storage humidity	≤75% RH
Atmospheric pressure	Below 5000 above sea level
Self-Discharge (25°)	<3%/Month
Depth of discharge	>80%
C-rate Discharge	<0.8C
Cycle life	>6000Time(<0.5C)


Other

Certification standards	UN38.3/CE/MSDS/DGM
Warranty	5 years
Product Size	614±2×507±2×212±2mm
Packing Size	668±2×645±2×713±2mm

Tel: +86-06332190373 Fax: +86-0633-2165720



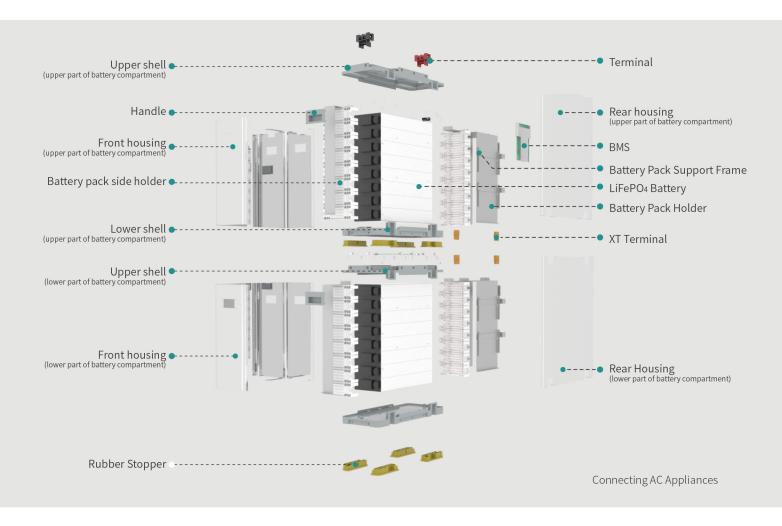


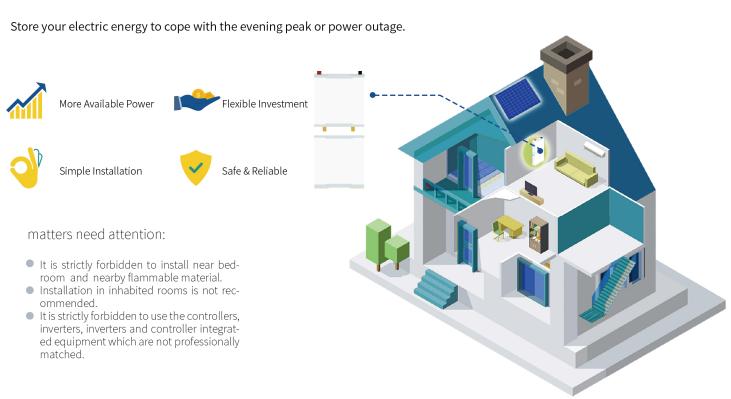

Tel: +86-06332190373 Fax: +86-0633-2165720 Email: sales@bluecarbontech.com



PRODUCT ADVANTAGES

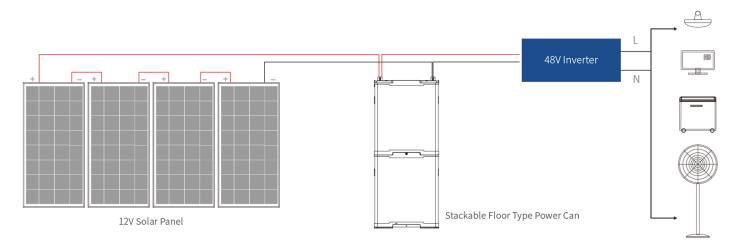

AC Electrical Appliances

- All in one mould design and production, easy to install.
- With longer span life LiFePO4 battery, over 12 years lifespan, ensure the whole set products' life span.
- Dustproof structure d esign, DC output, safe and reliable.
- Integrated packaging, safe and convenient to transport.
- Wide voltage input, when unexpected high voltage input, can effectively block the high voltage, so that the BMS of the battery will not be broken down, greatly
 reducing the risk of thermal runaway combustion of lithium battery.
- Compact appearance design, extremely compressed product thickness, greatly reducing space occupancy.
- High quality aluminium magnesium alloy, anti-corrosion, substantial, durable, artistic, practical.
- Integrated charging and storage, reduce wiring, installation and other work, and facilitate user operation.

Military aviation plug

Never oxidize in high temperature, high humidity and high-salt environment; No risk of thermal runaway and fire




Split-type building block design

Buckle design, which can increase the capacity by alignment and stacking; Firmly fixed and can be carried by single person



Rubber Feet Pad

The bottom of battery is equipped with rubber feet pad to increase safety and play roles of shock-proof buffer, anti-static, electrical insulation and so on.



Tel: +86-06332190373 Fax: +86-0633-2165720




Battery Specification


Different Rate Discharge Curve (25℃)

56.0 52.8 49.6 49.6 40.0 36.8 2C 1C 0.5C 0.2C 0.1C 0 20min 40min 60min 2h 5h 10h Discharge Time


Different Temperature Discharge Curve (0.5C)

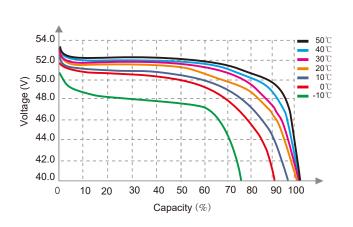


State of Charge Curve (0.5C, 25°C)

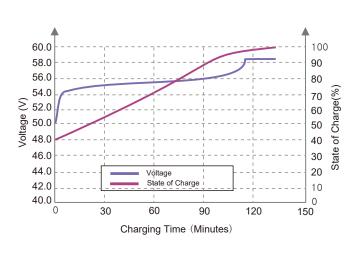


Charging Characteristics (0.5C, 25℃)

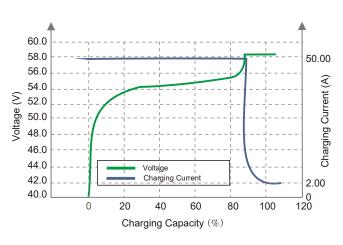

Different DOD Discharge Cycle Life Curve(1C)

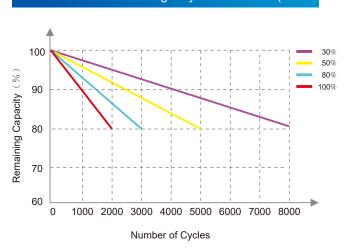


Different Temperature Self Discharge Curve

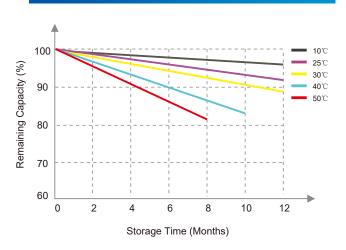

Tel: +86-06332190373 Fax: +86-0633-2165720



SCENES TO BE USED

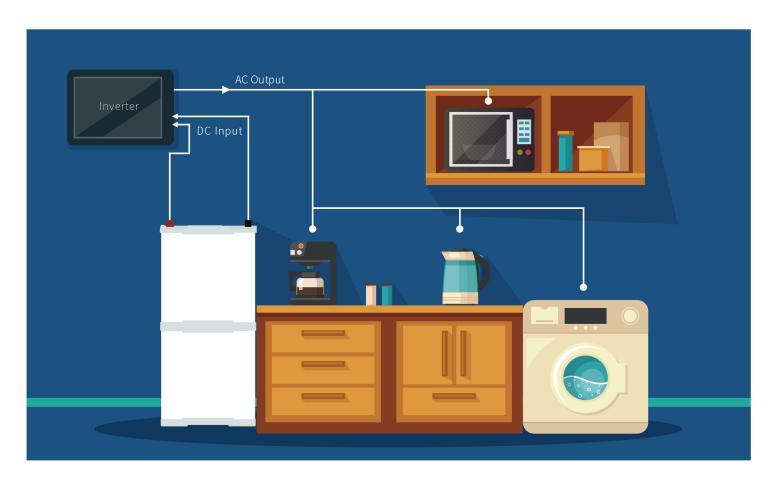













Tel: +86-06332190373 Fax: +86-0633-2165720



APPLICATION CASE









System Configuration

15.36kWh :

Solar Panel

Nigeria

• Inverter • 15.36kWh Energy Storage Battery

Tel: +86-06332190373 Fax: +86-0633-2165720